

RoofLITE+

TECHNICAL DATA SHEET

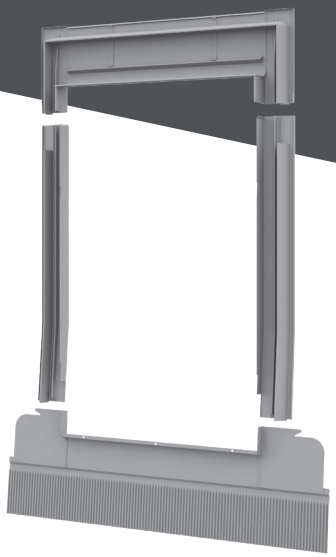

TFX

TILE FLASHING



16-50 mm

FEATURES
Perfect watertightness
Easy installation
Weather and UV ray resistant
Lead free
Foam gasket
Aluminium apron to ensure a perfect seal to profiled roofing materials







APPLICABLE
In roof pitch range of 15-90°
Tile profile height 16-50 mm

MATERIAL
Aluminium
Powder coated grey, RAL 7043

FLASHING SELECTION GUIDE	
WINDOW SIZE CODE	**FLASHING CODE**
C2A	TFX C2A
C4A	TFX C4A
F4A	TFX F4A
F6A	TFX F6A
M4A	TFX M4A
M6A	TFX M6A
M8A	TFX M8A
M10A	TFX M10A
P6A	TFX P6A
P8A	TFX P8A
S6A	TFX S6A
S8A	TFX S8A