

RoofLITE+

TECHNICAL DATA SHEET

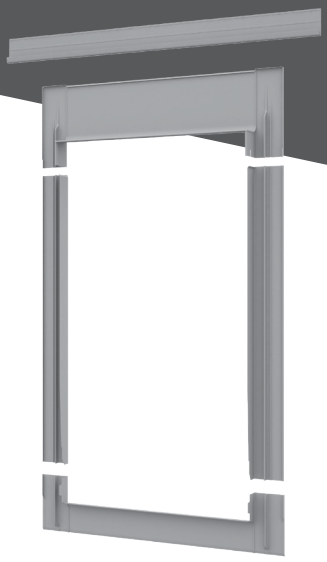

LSX


SLATE FLASHING



0-16 mm (2x8 mm)

FEATURES
Perfect watertightness
Easy installation
Weather and UV ray resistant
Lead free
One-piece side parts
Without apron to ensure a perfect seal to flat roofing materials



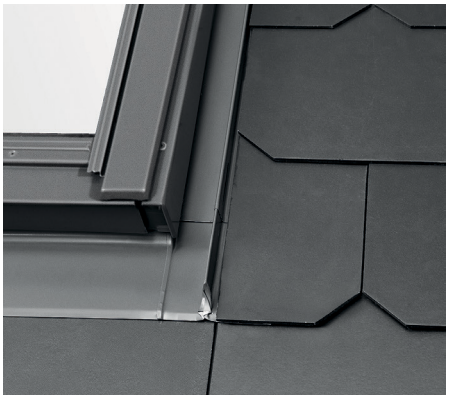

APPLICABLE
In roof pitch range of 15-90°
Slate profile height 0-16 mm (2x8 mm)

MATERIAL
Aluminium
Powder coated grey, RAL 7043

FLASHING SELECTION GUIDE	
WINDOW SIZE CODE	**FLASHING CODE**
C2A	LSX C2A
C4A	LSX C4A
F6A	LSX F6A
M4A	LSX M4A
M6A	LSX M6A
M8A	LSX M8A
S6A	LSX S6A